
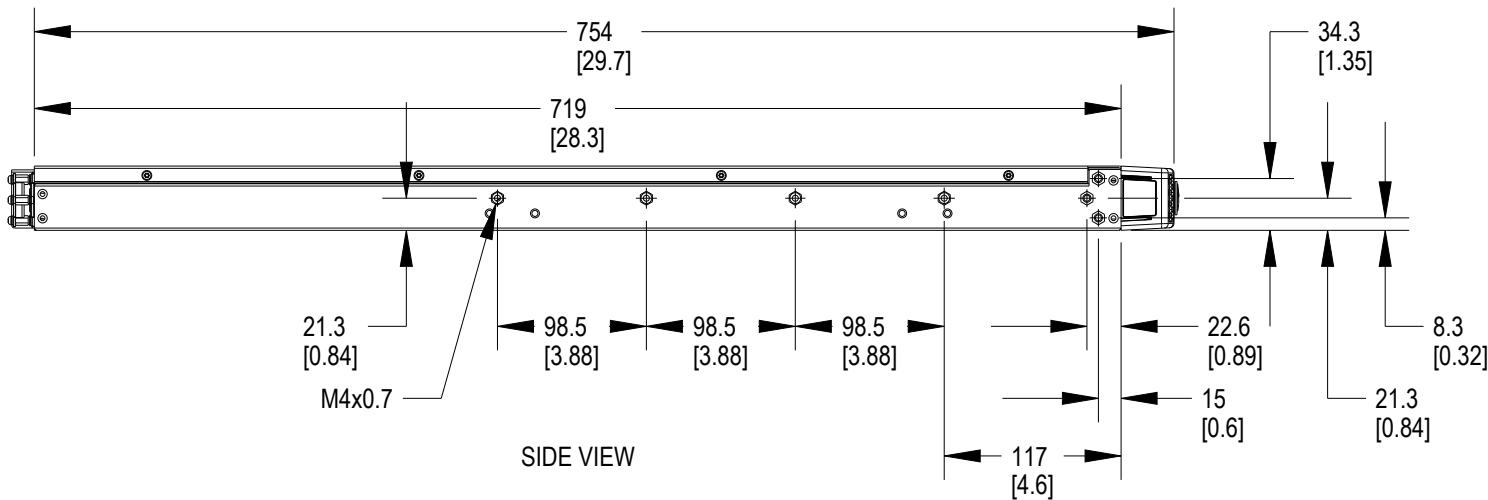
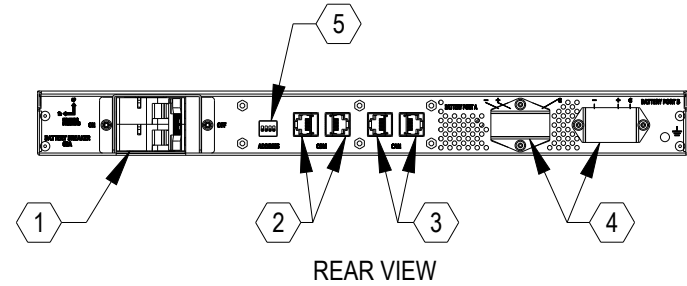


2

1

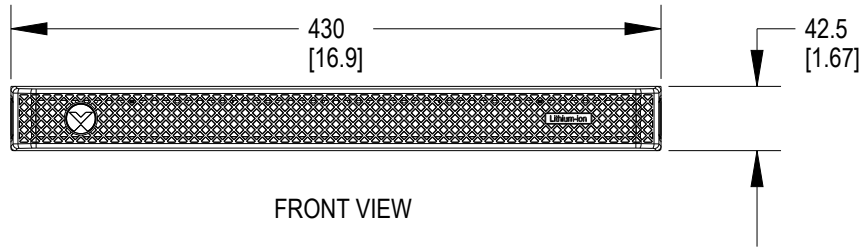

- ① OUTPUT CIRCUIT BREAKER (63A)
- ② EXTERNAL BATTERY CABINET COM PORTS
- ③ EXTERNAL BATTERY CABINET CAN PORTS
- ④ EXTERNAL BATTERY CABINET POWER CONNECTORS
- ⑤ ADDRESS DIP SWITCH

NOTES

- 1. UNIT DIMENSIONS (WxDxH) 430mm x 754mm x 42.5mm (1U)
(16.9") x (29.7") x (1.7")
- 2. UNIT WEIGHT: 22kg (48.5lbs)
- 3. SHIPPING DIMENSIONS (WxDxH) 800mm x 1000mm x 285mm
31.4" xx 39.3" x 11.2"
- 4. SHIPPING WEIGHT 48.5kg (106.9lbs)
- 5. MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0")
FRONT AND REAR.

B

B

A

A

SHEET NO. 1 OF 1	DRAWN BY: AVINASH PATIL
CO. NO. -	DESIGNED BY: P BENNER
REF DWG. -	APPROVED BY: N SECORD

OUTLINE DRAWING LIEBERT GXT5 LITHIUM-ION 5-10kVA 192V EXTERNAL BATTERY CABINET	DWG. NO. VEBCLI-192VRT1U
	DATE (LATEST REV.) 10-AUG-22
	REVISION 0

1050 DEARBORN DR P.O. BOX 29186 COLUMBUS, OH 43229
--



2

1