



2


1

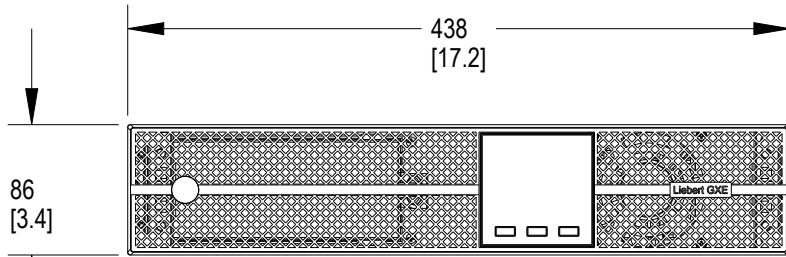

FRONT VIEW

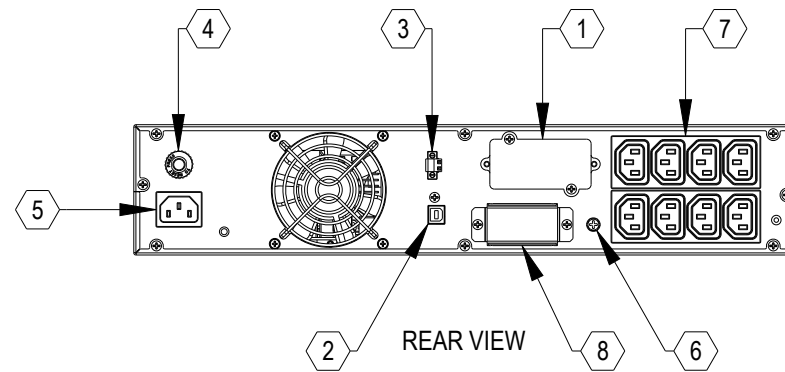

REAR VIEW

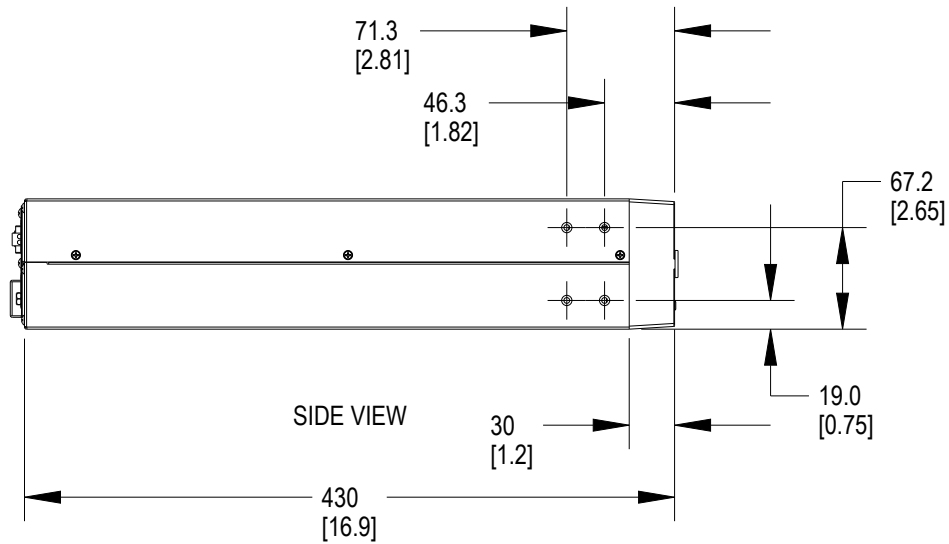

SIDE VIEW

- ① INTELLISLOT PORT
- ② USB PORT
- ③ EPO PORT
- ④ 10A INPUT CIRCUIT BREAKER
- ⑤ 10A INPUT POWER PLUG (C14)
- ⑥ EXTERNAL GROUND SCREW
- ⑦ IEC OUTPUT RECEPTACLES (C13)
- ⑧ EXTERNAL BATTERY CONNECTOR

NOTES :

- 1. UNIT DIMENSIONS (W x D x H) : 438mm x 430mm x 86mm (17.2" x 16.9" x 3.4")
- 2. UNIT WEIGHT : 16.0 Kg (35.2 Lbs)
- 3. SHIPPING DIMENSIONS (W x D x H) : 600mm x 560mm x 235mm (23.6" x 22.0" x 9.3")
- 5. SHIPPING WEIGHT : 17.6 Kg (38.8 Lbs)
- 6. MINIMUM AIRFLOW CLEARANCE : 100mm (4.0") FRONT & REAR.

SHEET NO. 1 OF 1	DRAWN BY: ANIKET PATIL	TITLE  OUTLINE DRAWING LIEBERT GXE3-1000IRT2UXL UPS
CO. NO. -	DESIGNED BY: PETE BENNER	
REF DWG. -	APPROVED BY: BAPIN NARAYANKAR	

DWG. NO. GXE3-1000IRT2UXL_OL	505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082
DATE (LATEST REV.) 13-DEC-23	
REVISION 0	



2

1